

INSTALLATION GUIDELINE


WRONG ❌



CORRECT ✅



MEMBRANE D
Hotline: 012-232 9298

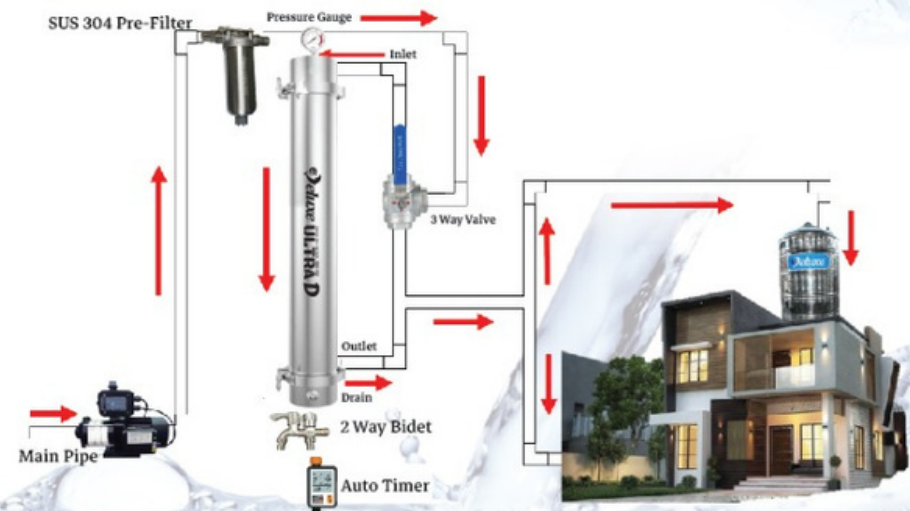

Distributor:



CONLEX
ENTERPRISE SDN.BHD.
康力企業有限公司 (171157-W)



**Clean Water
For Everyone**



0.01 Micron



**10 Micron
6 LAYERS SAND FILTER**


**DELUXE WATER FILTER SYSTEM
FOR COMMERCIAL AND RESIDENTIAL USE**

www.deluxewatertank.com

DELUXE Water Filter

	FRP1044	FRP1252	STAINLESS STEEL
Total Height	48inch/1200mm	60inch/1520mm	48inch/1200mm
Tank Height	42inch/1050mm	52inch/1320mm	42inch/1050mm
Tank Diameter	10inch/250mm	12inch/300mm	10inch/250mm
Valve Size	1 or 3/4 inch	1inch	1 or 3/4 inch
Media Capacity	40kg	45kg	40kg
Weight	55kg	60kg	50kg
Min. Working Pressure	25psi / 25AR	25psi / 25AR	25psi / 25AR
Max. Working Pressure	120psi / 108AR	120psi / 108AR	120psi / 108AR
Flow Rate	45Lpm	46Lpm	45Lpm

- ⑤ **Anthracite Carbon 碳**
Primary function of the carbon, it leaves 10% to 20% the chlorine in the water to give bacteria-static benefit to the water
- ③ **Fine Caravel 细沙**
Remove dirt and prevent diseases such as typhoid, Cholera, Bihdryia and Amoeba.
- ① **Coarse Gravel 粗沙**
Anderbed support, to balance the pH and increase oxygen content

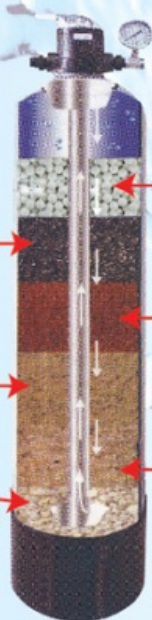

- ⑥ **Bio Ceramic 生物陶瓷**
Activation and oxygenation of water molecules for better cell absorption to promote metabolism and improve body immune and defense system
- ④ **Zeolite 沸石**
Natural occuring mineral rock, procures a unique capacity to adsorb ammoniaand various ionic
- ② **Fine Sand 中沙**
Trappy of fine sediment and remove dirty

DUF 4000

4,000 LITER Per Hour
complete with 5 accessories
MEMBRANE



1. Pressure Bar



2. Stainless Steel 304 Strainer



3. 3 Way Valve



4. Stainless Steel 304 Double Tap



5. Digital Irrigation Auto Timer

Technical Specification

Model	DUF4000
Flow Rate	4000-Liters Per Hour (Lab Capacity)
Connector	Water Inlet and Outlet Diameter 3/4" Male
Diamension	Diameter 6.5" x 40" (165mm x 1028mm x 205mm)
Material	Super Polysulfone Membrane
Max. Pressure	5-Bar (72.5psi)
Warranty	10 Year Warranty (on membrane Module)

DUF 4500

4,500 LITER Per Hour
complete with 5 accessories
MEMBRANE



Technical Specification

Model	DUF4500
Flow Rate	4500-Liters Per Hour (Lab Capacity)
Connector	Water Inlet and Outlet Diameter 3/4" Male
Diamension	Diameter 7" x 27.5" (176mm x 695mm x 210mm)
Material	PVDF Polyvinylidene Difluoride
Max. Pressure	5-Bar (72.5psi)
Warranty	10 Year Warranty (on membrane Module)

Water Purifier Comparison Chart

TAB WATER 自来水		
100 Micron Particle Filtration		Coat, Active Carbon, Particles, Sand 炭, 砂石, 昆虫
10 Micron Sand Filtration		Mist, Pollen, Hair 雾, 花粉, 毛发
1 Micron Micro Filtration		Yeast, Blood Cells, Flour, Bacteria 酵母, 红细胞, 细菌
0.01 Micron Membrane Filtration		Vibrio, Chlorerae, E-Coli, Virus 大肠杆菌, 病毒
0.0001 Micron Reverse Osmosis		Mineral, Calcium 矿物质, 钙质
PURE WATER 纯水		